

# INSTRUCTIONS FOR ASSEMBLY AND INSTALLATION FIXTURES COVERED BY THIS INSTRUCTION SHEET: 4170 & 4171

## READ AND UNDERSTAND THESE INSTRUCTIONS BEFORE INSTALLING FIXTURE.

This fixture is intended for installation in accordance with the National Electrical Code and local regulations. To assure full compliance with local codes and regulations, check with your local electrical inspector before installation. To prevent electrical shock, turn off electricity at fuse box before proceeding.

**Retain these instructions for maintenance reference.**

1. Thread **MOUNTING STUDS** into **CROSSBAR**. Attach **CROSSBAR** to **OUTLET BOX** with **OUTLET BOX SCREWS**.
2. Make connections: Black fixture lead or fixture lead without tracer mark to black supply lead; white fixture lead or fixture lead with tracer mark to white supply lead. Uninsulated wire is a **GROUND WIRE** and must be attached to ground terminal or **GROUND WIRE** in **OUTLET BOX**. Use **WIRE NUTS** (local hardware item). Place connections in **OUTLET BOX**.
3. Place **CANOPY SUB-ASSEMBLY** over **MOUNTING STUDS** and tighten with **CAP SCREWS**.
4. Install recommended lamps.
5. Attach **GLASS SHADE** by looping **WIRE HARPS** carefully over **MOUNTING HOOKS** (Fig. 2).
6. Check to make sure **GLASS SHADE** is level. **GLASS SHADE** may be leveled by turning one or more of the **LEVELING KNOBS** on the **LEVELING STUDS**. **NOTE:** Be careful not to unthread **LEVELING KNOB** from **LEVELING STUD** (Fig. 2).

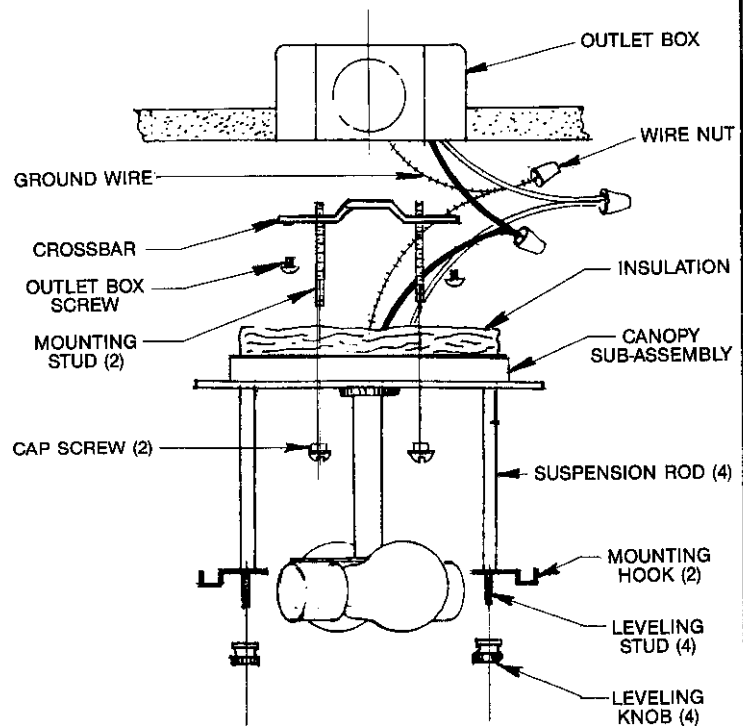


FIG. 1

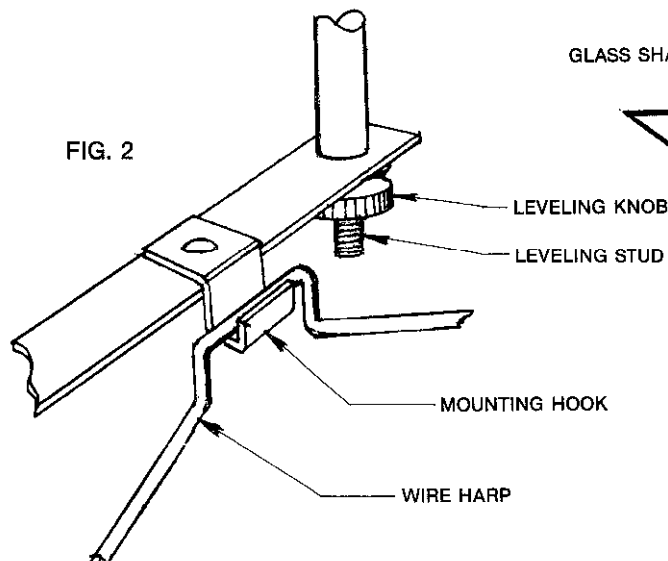


FIG. 2